

CM-200


Megapixel Camera (2Mega)




[Features]

- 2.0 Megapixel 1/2.5" CMOS Image sensor
- Max full HD(1920x1080 30p) video with progressive scan
- Optical 10x zoom with Auto-focusing
- Live video HDMI interface
- Dual streaming of ultra fine quality H.264/JPEG or H.264/H.264
- Video Bitrate : 32kbps ~ 8Mbps
- CMS up to 36 channels live monitoring, recording, search&playback
- Sensor input terminals
- 1 channel audio In/Out
- Alarm output terminals
- RS-485 terminals
- PoE optional

[Dimensions]

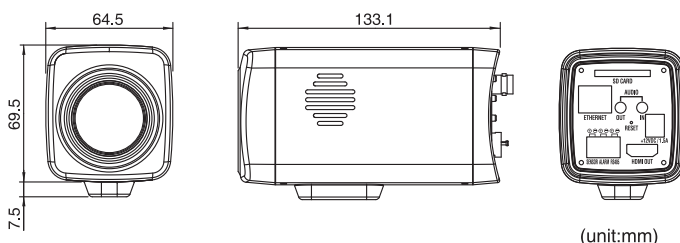

[Optional Accessories]

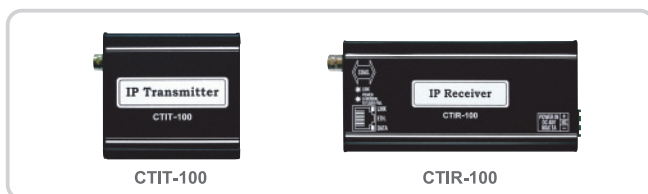

[Specifications]

NETWORK	
Interface	Ethernet 10/100Base-T (RJ-45)
Protocol	TCP/IP, UDP, Multicast, DHCP, SMTP, HTTP, SNMP, RTP, RTSP
VIDEO	
Standards	H.264 / JPEG or H.264 / H.264
AUDIO	
Algorithm	G.711u
Input	1 x Line-In
Output	1 x Line-Out
Sample Rate	8KHz
Bitrate	64Kbps
SERIAL PORT	
Sensor Input	1 x RS-485
Data Rate	2,400bps ~ 115,200bps
SENSOR / ALARM / ETC	
Sensor Input	1port
Alarm Output	1port
Reset Button	1port
CAMERA	
Image Sensor	1/2.5" CMOS Image sensor
Lens	1/3.6", f=4.5~45.0mm F1.8~2.2 x10 optical zoom and x10 digital zoom
Output	1x HDMI
Exposure	Flickerless, Metering, Mode, Aperture, Shutter Speed, Brightness
Focus	Focus Range, Zoom Tracking
White Balance	Auto, Indoor, Outdoor
Motion Detection	On/Off
PHYSICAL	
Power Source	DC 12V, PoE(Power over Ethernet) : 802.3af
Power Consumption	Max. 500mA
Operating Temp.	-10°C ~ 50°C / 14°F ~ 122°F
Humidity	30% ~ 80%RH
USER INTERFACE	
System Status	LED
MANAGEMENT S/W	Support web viewer, 16ch viewer, 36ch viewer (optional)